

## Journal Pre-proofs

Cost-effective building renovation at district level combining energy efficiency & renewables – Methodology assessment proposed in IEA-Annex 75 and a demonstration case study

Jon Terés-Zubiaga Term, Roman Bolliger, Manuela G. Almeida, Ricardo Barbosa, Jørgen Rose, Kirsten E. Thomsen, Eduardo Montero, Raúl Briones-Llorente

PII: S0378-7788(20)31056-2  
DOI: <https://doi.org/10.1016/j.enbuild.2020.110280>  
Reference: ENB 110280


To appear in: *Energy & Buildings*

Received Date: 1 April 2020  
Revised Date: 2 June 2020  
Accepted Date: 29 June 2020

Please cite this article as: J. Terés-Zubiaga Term, R. Bolliger, M.G. Almeida, R. Barbosa, J. Rose, K.E. Thomsen, E. Montero, R. Briones-Llorente, Cost-effective building renovation at district level combining energy efficiency & renewables – Methodology assessment proposed in IEA-Annex 75 and a demonstration case study, *Energy & Buildings* (2020), doi: <https://doi.org/10.1016/j.enbuild.2020.110280>

This is a PDF file of an article that has undergone enhancements after acceptance, such as the addition of a cover page and metadata, and formatting for readability, but it is not yet the definitive version of record. This version will undergo additional copyediting, typesetting and review before it is published in its final form, but we are providing this version to give early visibility of the article. Please note that, during the production process, errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

© 2020 Published by Elsevier B.V.

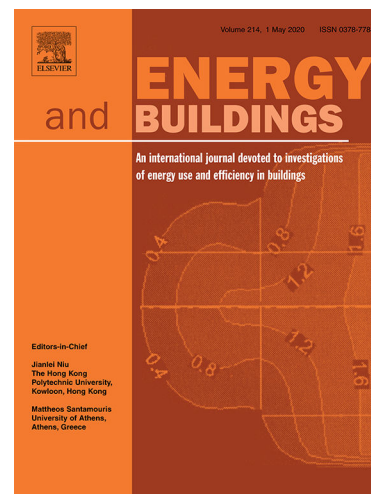

1 Cost-effective building renovation at district level combining  
2 energy efficiency & renewables – Methodology assessment  
3 proposed in IEA-Annex 75 and a demonstration case study.

---

4 **Jon Terés-Zubiaga<sup>(1)\*</sup>, Roman Bolliger<sup>(2)</sup>, Manuela G. Almeida<sup>(3)</sup>, Ricardo Barbosa<sup>(3)</sup>,  
5 **Jørgen Rose<sup>(4)</sup>, Kirsten E. Thomsen<sup>(4)</sup>, Eduardo Montero<sup>(5)</sup>, Raúl Briones-Llorente<sup>(5)</sup>****

6 *(1) ENEDI Research Group, Department of Energy Engineering, Faculty of Engineering of Bilbao,  
7 University of the Basque Country UPV/EHU, Plaza Ingeniero Torres Quevedo 1, 48013 Bilbao, Spain*

8 *(2) INDP, Habsburgerstrasse 3, 6003 Luzern, Switzerland*

9 *(3) Department of Civil Engineering, University of Minho, Campus de Azurém, 4800-058 Guimarães,  
10 Portugal.*

11 *(4) Department of the Built Environment, Aalborg University, A C Meyers Vænge 15, DK-2450  
12 Copenhagen, Denmark.*

13 *(5) Department of Electromechanical Engineering, University of Burgos, Avenida Cantabria, 09006  
14 Burgos, Spain.*

#### 15 ABSTRACT

16 Building renovation plays a key role in reducing greenhouse gas emissions and achieving the climate  
17 protection goals. The district scale approach is one of the most effective approaches to accelerate this  
18 process of reducing the energy consumption in the building sector as increasing its renovation rates. In  
19 this context, the Energy in Buildings and Communities Programme of the IEA, IEA-EBC started in 2017  
20 the project “Annex 75: Cost-Effective Building renovation at District Level Combining Energy Efficiency  
21 and Renewables” aiming to explore optimal opportunities of district renovations from a cost-benefit  
22 perspective. IEA Annex 75 is a co-operative effort of participants from 13 different countries: Austria,  
23 Belgium, China, Czech Republic, Denmark, Germany, Italy, The Netherlands, Norway, Portugal, Spain,  
24 Sweden and Switzerland. In this paper, key elements of the methodology developed in Annex 75 project  
25 are presented. This methodology aims to facilitate the identification of optimal solutions in different  
26 European countries, enabling to explore similarities and differences amongst them, with a particular focus  
27 on the balance between energy efficiency measures and renewable energy measures. After a detailed  
28 description of the developed methodology, it is also applied to a case study located in Portugal and results

---

\*Corresponding author: [jon.teres@ehu.eus](mailto:jon.teres@ehu.eus)

1 obtained are analysed in detail. The paper demonstrates the usefulness of the methodology for evaluating  
2 and identifying optimal solutions in renovations at district scale, as well as for successfully addressing the  
3 research questions investigated by the Annex 75 project. They also provide some insights regarding the  
4 specific case study, showing that, although district systems are not usual in the current Portuguese  
5 context, these centralised solutions in renovations at district level are cost-effective interventions that can  
6 lead to significant reductions of greenhouse gas emissions and non-renewable primary energy use.

7 Keywords: *IEA-EBC Annex 75, Cost-Effective, District renovation, Energy Efficiency in Districts,*  
8 *Renewable Energy in Districts, Methodology*

## 9 **1 Introduction**

10 It is well known that over 40% of the global energy consumption and 30% of greenhouse gas (GHG)  
11 emissions are related to the building sector [1]. Already in 2007, the Intergovernmental Panel on Climate  
12 Change synthesis report identified that the building sector was the sector with the main economic  
13 mitigation potentials using technologies and practices expected to be available in 2030 (estimated from  
14 bottom-up studies) [2]. In this context, the European Union (EU) adopted in 2007 the “2020 Climate and  
15 Energy Package” [3], and the roadmap was updated in October 2014 with the definition of the “2030  
16 Climate & Energy Framework” [4]. As far as the building sector is concerned, the Directive 2012/27/EU  
17 on Energy Efficiency [5], which aims at increasing the energy efficiency for achieving aforementioned  
18 objectives, highlights the potential for saving primary energy (PE) of district heating and cooling systems,  
19 and it urges the Member States to carry out a comprehensive assessment of the mentioned potential.  
20 Earlier, the recast of the Energy Performance in Buildings Directive (EPBD) [6] involved a turning point  
21 on the path towards the improvement of the efficiency of the building stock. This directive introduced two  
22 important concepts: cost-optimality and nearly Zero Energy Buildings (nZEB), but mainly focused on new  
23 buildings. However, taking into consideration the low rates of replacement of the building stock in Europe  
24 [7], new buildings clearly can only play a smaller role in the overall reduction of GHG emissions related  
25 to the building stock. Hence, the main challenge is linked to the existing building stock, and energy  
26 renovation will play a key role on the overall objective of facing climate change by reducing carbon  
27 emissions. As a consequence, as mentioned in [8], several cities around the world have established  
28 strategic targets for GHG reductions focused on the urban environment, including the building stock  
29 amongst the main target areas.

1 It is within this background that IEA-EBC launched in 2010 the project “Annex 56: Cost-Effective Energy  
2 and Carbon Emissions Optimization in Building renovation”. This project involved 11 European countries  
3 with the aim of developing a methodology to enable cost-effective renovation of existing buildings by  
4 identifying the optimal balance point of energy efficiency (EE) and renewable energy supply (RES)  
5 measures in a cost/benefit perspective. The project went on until 2017 and it gave rise to several academic  
6 publications, which can be found in the literature [7, 9-14] and in different reports, which are available on  
7 the website of the project [15].

8 However, building renovation rates have not reached targeted goals for many years [16], and there is a  
9 general agreement that it is necessary to accelerate these rates. Therefore, the district scale approach is  
10 considered to be as one of the potentially most effective approaches to speed up the process of reducing  
11 greenhouse gas emissions in the building sector. Moreover, this approach can also allow taking advantage  
12 of the interactions and synergies amongst the different buildings and optimising the implementation and  
13 integration of renewable energy sources. To implement this approach, municipalities and other  
14 stakeholders need methods and tools that support them to identify the potentials of different building  
15 clusters for reducing greenhouse gas emissions and energy consumption as well as the optimal solution  
16 in each case [8]. The idea of fostering integrated district-level energy efficiency renovation approaches are  
17 also mentioned by the European Union in different Commission recommendations, such as CR-EU  
18 2019/786 of 8 May 2019 on building renovation [17]. This idea is furthermore indicated in the update of  
19 the EPBD in 2018, which states that the Commission “*shall review this Directive by 1 January 2026 at  
20 the latest*” and “*as part of that review, (...) examine in what manner Member States could apply  
21 integrated district or neighbourhood approaches in Union building and energy efficiency policy (...) by  
22 means of overall renovation schemes applying to a number of buildings in a spatial context instead of a  
23 single building*” [18].

24 As a consequence, a substantial amount of publications can be found in the literature focused on this field.  
25 One example is the already mentioned work published by S. Paiho et al. [8]. S. S. Castro et al proposed in  
26 [19] a decision matrix as a tool to identify the most appropriate retrofit measures of an existing building.  
27 Another example is the work recently published by V. D’Alonzo et al. [20], where a methodology for the  
28 building stock analysis of the residential sector is presented, which integrates input data in a Geographical  
29 Information System, without using the “archetypes approach” and simulation tools. Several publications  
30 have also focused on more specific issues on this field, such as on evaluating the different available tools

1 for this kind of assessments at district scale. One example is the work presented by S. Ferrari et al. in [21],  
2 focused on methods for estimating building energy demand at district level; or [22], which evaluates  
3 available tools for assessing energy systems for building clusters.

4 Based on all these references, the Annex 75 project aims to go further, by means of applying a  
5 comprehensive analysis which covers not only the energy, economic and environmental issues, but also  
6 additional issues such as identifying opportunities and barriers on the relations between the different  
7 involved stakeholders or policies and incentives for boosting energy renovations. To do that, the  
8 methodology presented in this paper will be applied to different case studies located in different countries,  
9 in such a way that its application will allow to carried out a comparative analysis targeted to identified the  
10 optimal strategies and lessons learned which will be able to be extrapolated to any other district according  
11 to its specific conditions.

## 12 **2 IEA-EBC Annex 75. Cost-effective Building Renovation at District Level** 13 **Combining Energy Efficiency & Renewables**

14 In the context previously explained, IEA-EBC started in 2017 a new project “Annex 75: Cost-Effective  
15 Building renovation at District Level Combining Energy Efficiency and Renewables”. The project involves  
16 25 institutions from 13 different countries and, in this case, it explores the opportunities of building  
17 renovations from a cost-benefit perspective at district level.

18 The project aims at assisting in clarifying the cost-effectiveness of various approaches combining both EE  
19 and RES implementation and focusing on the optimal combination between them, with respect to various  
20 possible starting situations in a specific city district. Thus, in particular the following research questions  
21 (RQ) are investigated within the Annex 75 project:

- 22 • RQ1. What are cost-effective combinations between RES measures and EE measures to achieve  
23 far-reaching reductions in GHG emissions and PE use in urban districts meeting the pre-set  
24 targets?
- 25 • RQ2. How do related strategies compare in terms of cost-effectiveness and impacts with strategies  
26 that combine a decentralised switching of energy carriers to RES with EE measures on the  
27 buildings' envelopes?

- 1 • RQ3. Which factors determine the cost-efficient balance between efficiency measures on the  
2 buildings envelopes and measures to use RES, if far-reaching reductions in GHG emissions and  
3 PE use in urban districts are the targets?
- 4 • RQ4. To what extent does the cost-effectiveness of renovation measures on the building envelopes  
5 in the case of a local district heating system based on RES differ from the cost-effectiveness of  
6 such measures in case of a decentralised use of RES for heating in each individual building?

7 Given the current necessity to achieve a building stock free of greenhouse gas emissions, it is in particular  
8 investigated which approaches, taking into account various possibilities for energy efficiency measures  
9 and renewable energy measures, allow to achieve districts supplied entirely with renewable energies at  
10 least costs.

11 For answering these research questions, the project focuses on four specific objectives: i) to give an  
12 overview on various technology options, taking into account existing and emerging efficient technologies  
13 with potential to be successfully applied within that context; ii) to develop a methodology to be applied to  
14 urban districts in order to identify such cost-effective strategies; iii) to illustrate the development of such  
15 strategies in selected case studies and gather related best-practice examples; and finally, iv), to give  
16 recommendations to policy makers and energy related companies on how they can foster the uptake of  
17 cost-effective combinations.

18 As far as the second objective is concerned, a specific methodology is developed and applied in generic  
19 calculations as well as in parametric calculations based on real-world case studies. Through this  
20 application, it is intended to identify the factors that affect the cost-effectiveness of renovation strategies  
21 for urban districts, as well as evaluate synergies and trade-offs between RES measures and EE measures,  
22 and between individual and collective solutions.

23 The proposed methodology builds on the methodology developed for individual buildings in Annex 56  
24 [23] extending it to the level of groups of buildings. This change of scale, as well as the objective of applying  
25 it in different contexts, involve some issues that should be taken into consideration. On the one hand, this  
26 methodology should be flexible enough to be applied to the different specific conditions existing in each  
27 country; on the other hand, to clearly define how to make comparisons between different cases and obtain  
28 consistent conclusions. The objective of the methodology is to support decision makers in the evaluation  
29 of the efficiency, impacts, cost-effectiveness and acceptance of different possible strategies for renovating  
30 urban districts, making the identification of the most suitable options easier. The project plans to develop

1 or adapt one or more calculation tools to support the application of the methodology in case-specific  
2 assessments.

3 Hence, the objective of this paper is to describe the mentioned methodology in detail and demonstrate its  
4 use by applying it to an example of a case study located in Portugal, in the Picoto neighbourhood, a social  
5 housing neighbourhood built in the 90's and located in Braga region, in the north of Portugal.

6 The rest of the paper is organised as follows: section 3 gives a detailed description of the proposed  
7 methodology, where different assumptions and considerations related to energy as well as economic and  
8 environmental issues are presented. Based on mentioned basis, the general procedure for evaluating cost-  
9 effective renovation strategies is described in section 4, whereas the methodology is tested and  
10 demonstrated on a case-study located in Portugal in section 5. Finally, the main conclusions and remarks  
11 are addressed in section 6.

### 12 **3 Methodology for assessing cost-effective building renovation strategies** 13 **at district level: scope, system boundaries and framework conditions**

14 In a similar way as defined by S. Paiho et al. in [8], this paper considers a “renovation at district scale” as  
15 a refurbishment of different buildings located in a same area and with a sort of relation amongst them,  
16 using the term “district” without referring to any juridical or administrative purpose.

17 Considering this global definition, the Annex 75 focuses mainly on residential districts, composed of both  
18 single and multifamily buildings. Districts with other buildings with similar characteristics, such as  
19 schools or simple office buildings without complex HVAC systems can be also considered. Complex HVAC  
20 systems refers to HVAC systems that are used not only for removing/replacing air in order to achieve a  
21 good indoor climate, but also include advanced control systems aimed at optimising the operation for  
22 heating and cooling such as, for instance, occupancy-based strategies for operating, or predictive control  
23 strategies for temperature control of air handling units. Typically, more complex HVAC systems would  
24 also require more detailed modelling, which is outside the scope of the methodology. Even though  
25 considering different uses usually drives to a more optimal solution by increasing the synergies amongst  
26 the evaluated buildings, it makes the assessment more complex, without providing additional information  
27 on the focus of the aforementioned research questions of this project. As far as the size of the district is  
28 concerned, there is no limit in the proposed methodology and it will depend on the specific features of the  
29 evaluated district;

1 Finally, regarding the typology of districts, different distinctions could be made according to the  
 2 environment, size of buildings, available options of RES and initial situation of a given district. The project  
 3 approach to these issues is summarised in Table 1.

4 **Table 1. Project approach to different typology-related issues**

		<b>Project Approach</b>
Typology of districts	Environment ( <i>Urban – Suburban – Rural</i> )	Focus on urban and suburban districts, because energy densities are higher than in rural districts, making district-based solutions therefore potentially more attractive
	Size of Buildings ( <i>Single family – Multifamily</i> )	Focus on districts containing multi-family residential buildings, also for reasons of potential attractiveness for district-based solutions
	Available options of RES	Focus on districts where a large number of options are available (both in terms of RES as well as possibilities for renovation of building envelopes) to be able to compare several scenarios.
	Initial Situation	Focus on districts currently heated mainly by fossil fuels (either through centralised or through decentralised systems).

5  
 6 The assessment considers the energy use for space heating, space cooling, domestic hot water (DHW),  
 7 ventilation, lighting and auxiliary electricity consumption for building integrated technical systems (fans,  
 8 pumps, electric valves, etc.). Additionally, it is recommended to include electricity for appliances, as they  
 9 contribute to electricity consumption and internal heat gains. Besides, it will also make it more feasible to  
 10 evaluate the potential of onsite generation (e.g. photovoltaic systems) to cover these loads.

### 11 **3.1 Definition of Key Performance Indicators**

12 Once the scope has been defined, the main indicators for evaluating and comparing different districts  
 13 amongst them are selected. These indicators allow to assess the level of sustainability and cost-  
 14 effectiveness of a given renovation project, or comparing different projects between them, as well as they  
 15 are a useful instrument to help to check to what extent the project goals are achieved. Several references  
 16 related to key performance indicators (KPIs) could be found in literature. It is interesting, as a way of  
 17 example, the review on KPIs approach in building renovation, presented in 2016 by A. Kylili et al. [24],  
 18 where the authors classified the KPIs found in literature into different categories. After a detailed analysis  
 19 of the different KPIs included in each category, three indicators have been considered to be most essential  
 20 and accordingly used in this methodology: GHG emissions (CO<sub>2</sub> eq./m<sup>2</sup>.year), PE use (kWh/m<sup>2</sup>.year) and  
 21 annualised total costs (€/m<sup>2</sup>.year). Depending on the specific features of each case study, additional KPIs  
 22 may be calculated, such as energy demand for the different uses (heating/cooling, DHW and electricity),



1 the ratio between RES and total energy needs or the share of electricity supply from the grid in relation to  
2 the total electricity consumption of the given case study, to name but a few..

### 3 **3.2 Energy demand side and energy supply side**

4 The level of sustainability and cost-effectiveness of renovation projects is defined according to the  
5 evaluation of these KPIs for each scenario assessed. The assessment is carried out based on matching  
6 energy needs of the district with energy supply, as Fig. 1 illustrates. The figure also includes the three  
7 indicators selected as essential in this project (in green-lined boxes with green background), as well as  
8 other additional indicators that could be useful in the evaluation of different cases (in green-lined boxes  
9 with white background). It should be noted that, in districts, buildings usually have different initial  
10 situations regarding their thermal envelope, systems, etc. Furthermore, there is the challenge that  
11 renovation cycles of the envelopes in a district are usually not synchronised. It is recommended to take  
12 such differences into consideration when providing recommendations on how to renovate a given district,  
13 as some buildings may be in need of renovation where others may have just had a renovation.

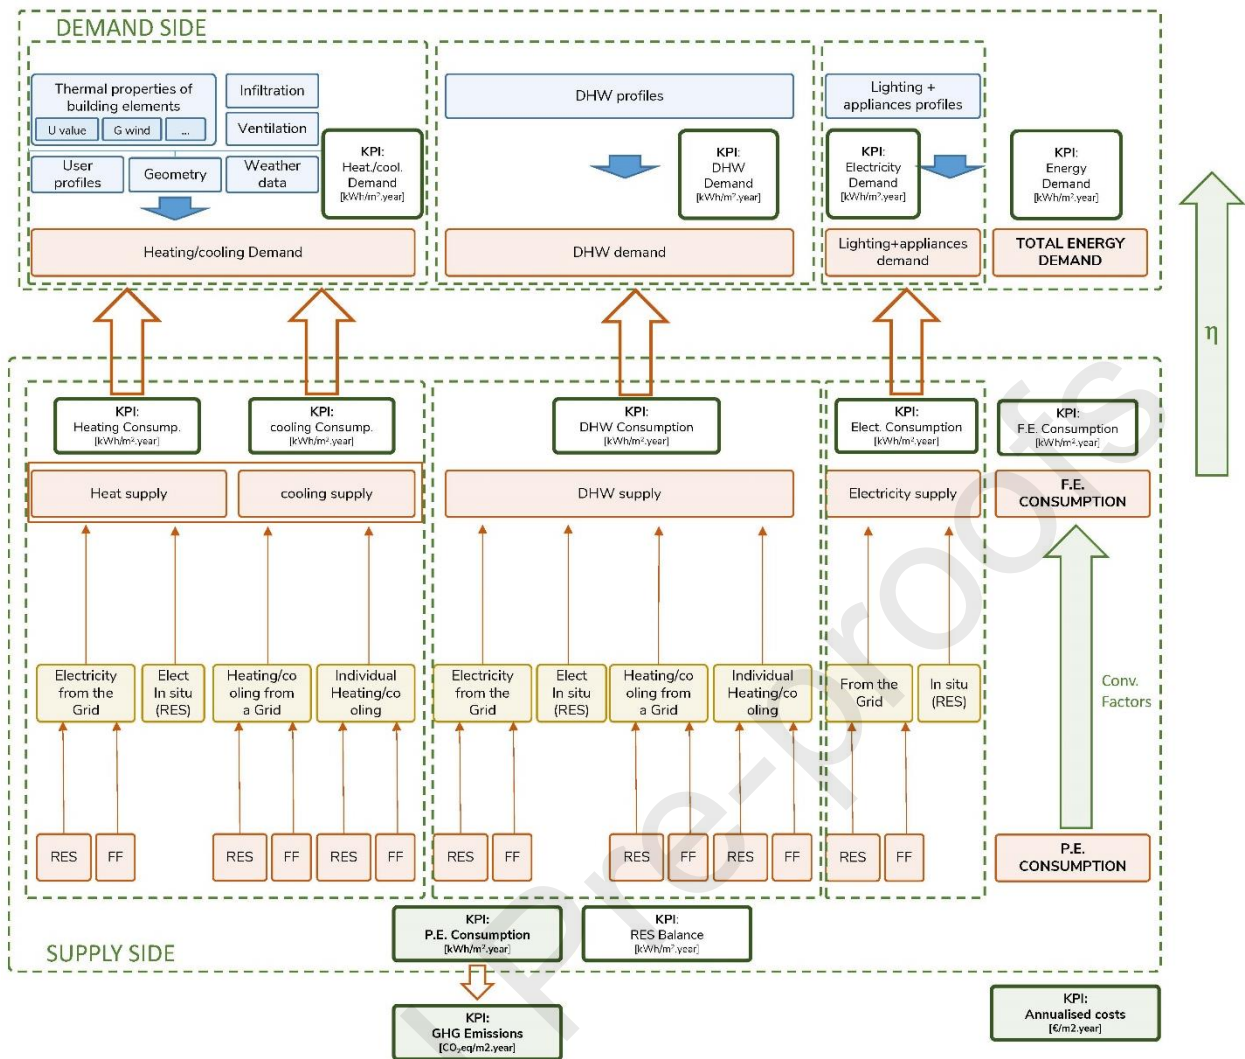


Fig. 1. Overview of principle of matching energy demand side and energy supply side

Based on this approach, building clusters can be evaluated using dynamic simulations (they are recommended with an hourly time step), in order to evaluate or specific tools for evaluating the global performance of the whole systems, or considering the demand side on the one hand, and the supply side on the other hand.

The energy needs for heating and cooling of each building of the evaluated district are calculated based on building dimensions and thermal properties. DHW demand, as well as electricity demand, are considered according to standard profiles of the country where the assessed case study is located.

As far as supply side is concerned, both centralised and decentralised energy systems can be taken into consideration in this methodology. Specific interactions amongst the different technologies (e.g. those related to thermal storage) can be considered in detail. Otherwise, simplified methods can be applied, considering general parameters, such as seasonal performance.

1 When characterising energy systems, four parameters are taken into account: cost (as a function of  
2 capacity), service lifetime, conversion efficiency and associated energy carrier. Several similarities with  
3 the assessment carried out for individual buildings in the Annex 56 project can be found in this  
4 methodology. However, it should be taken into consideration that, in order to extend the assessment to  
5 district heating systems, the cost structure of the district heating system should be considered by the  
6 different elements in it, in such a way that adding up the costs of all these elements (heating substations,  
7 pipes and distribution system or circulating pumps, amongst others) lead to the total costs of the heating  
8 system. These costs associated to the different elements include not only investment and maintenance  
9 costs (e.g. costs of distribution system include all the necessary work for putting the pipes into the ground)  
10 but also the energy losses and inefficiencies through these systems.

11 Finally, it should be mentioned that there are other parameters, which can play an important role when  
12 assessing the cost-effectiveness of district systems, such as the temperature gap between supply and  
13 return temperature, diameter of pipes, insulation level of distribution system, or similar specific  
14 parameters. However, there is not a specific focus on optimising these parameters for creating optimal  
15 systems. The focus is rather on parameters which are directly associated with the optimal balance between  
16 EE and RES measures.


17 Energy use for the different uses is evaluated based on energy needs calculated following the norm EN  
18 ISO 52016-1:2017 [25]. Measured energy consumption of a given building or building cluster, if available,  
19 can be used to assess the plausibility of the calculated energy needs, but it will not be used as a basis for  
20 the assessments. Related GHG emissions and PE consumption are calculated based on these energy values  
21 by applying the corresponding emission factors and PE factors of each country.

22 The GHG emission and PE factors are considered to be annual factors and constant over time. The factors  
23 for electricity are supposed to refer to a future country mix based on renewable energy. In addition, in  
24 some specific scenarios, it is possible to take into consideration other types of electricity mixes more  
25 closely to the current electricity mix.

### 26 **3.3 Economic analysis**

27 As far as economic assessment is concerned, the previous experience of Annex 56 project is taken as a  
28 reference, and a life-cycle approach is chosen to evaluate costs of different renovation opportunities. It  
29 includes, in accordance with the guidelines to the EPBD [27]: i) initial investment cost or replacement  
30 costs; ii) energy costs (including existing energy and CO<sub>2</sub> taxes); and iii) maintenance and operational

1 costs. These life cycle cost calculations are carried out dynamically. Therefore, it is proposed to use the  
 2 annuity method for transforming any costs into annual costs, assuming the initial costs, the interest rate  
 3 and the typical service lifespan for the renovation measures considered. In any case, alternatively, also the  
 4 global cost method can be used. All these costs are categorised in Fig. 2.

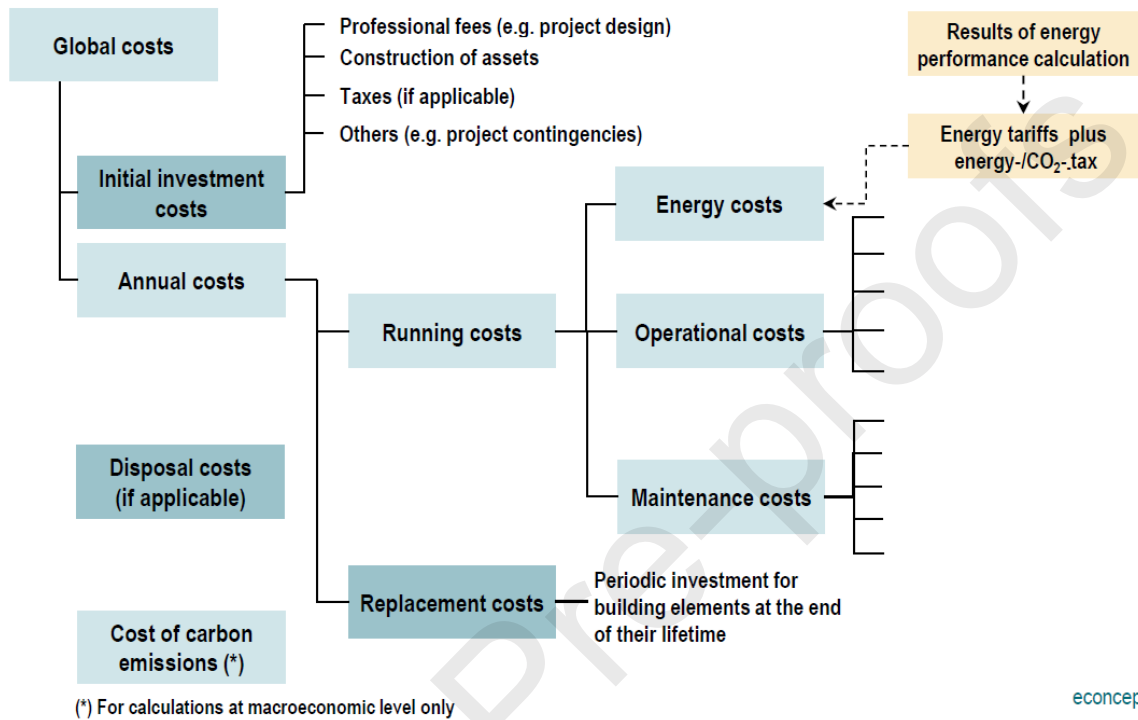

5  
 6 **Fig. 2. Cost categorisation according to the framework methodology of EPBD recast [27] (figure from W. Ott et**  
 7 **al. in [23])**

8 The cost assessment is carried out from a private perspective, i.e. the district is assessed as a unit, with  
 9 the aim of meeting the main target of the project (i.e. evaluating what type of combinations between EE  
 10 and RES measures are most cost-effective while satisfying the boundary conditions). Nevertheless, it is  
 11 considered to be appropriate for the project targets to investigate potential barriers for implementing the  
 12 most cost-effective solutions satisfying the boundary conditions, due to the fact that several energy actors  
 13 are usually involved.


14 As far as taxes are concerned, they are taken into account as given by the national framework conditions  
 15 for each case study. For CO<sub>2</sub> taxes, it is recommended to investigate various scenarios in a sensitivity  
 16 analysis when new or a change of related taxes are under discussions in the respective countries.

17 Subsidies for energy related measures are excluded from the general assessment of costs, in order to make  
 18 an assessment of the results that identifies optimal solutions regardless the effect of subsidies, which can  
 19 vary along the time or even depending on the city where the district is located. When investigating the

1 situation of a specific investor, they may nevertheless be included in a second alternative and specific  
 2 assessment. External costs, benefits and co-benefits are not included. Other issues, such as the effect of  
 3 the economy of scale are also considered in the methodology.

### 4 3.3.1 Energy related costs

5 Based on the previously defined hypotheses and considerations, the overview of the energy related money  
 6 flows are presented in Fig. 3. This approach aims at defining in a more detailed way mainly the running  
 7 costs previously mentioned in Fig. 2 and the links between energy and money flows in a given building  
 8 cluster.

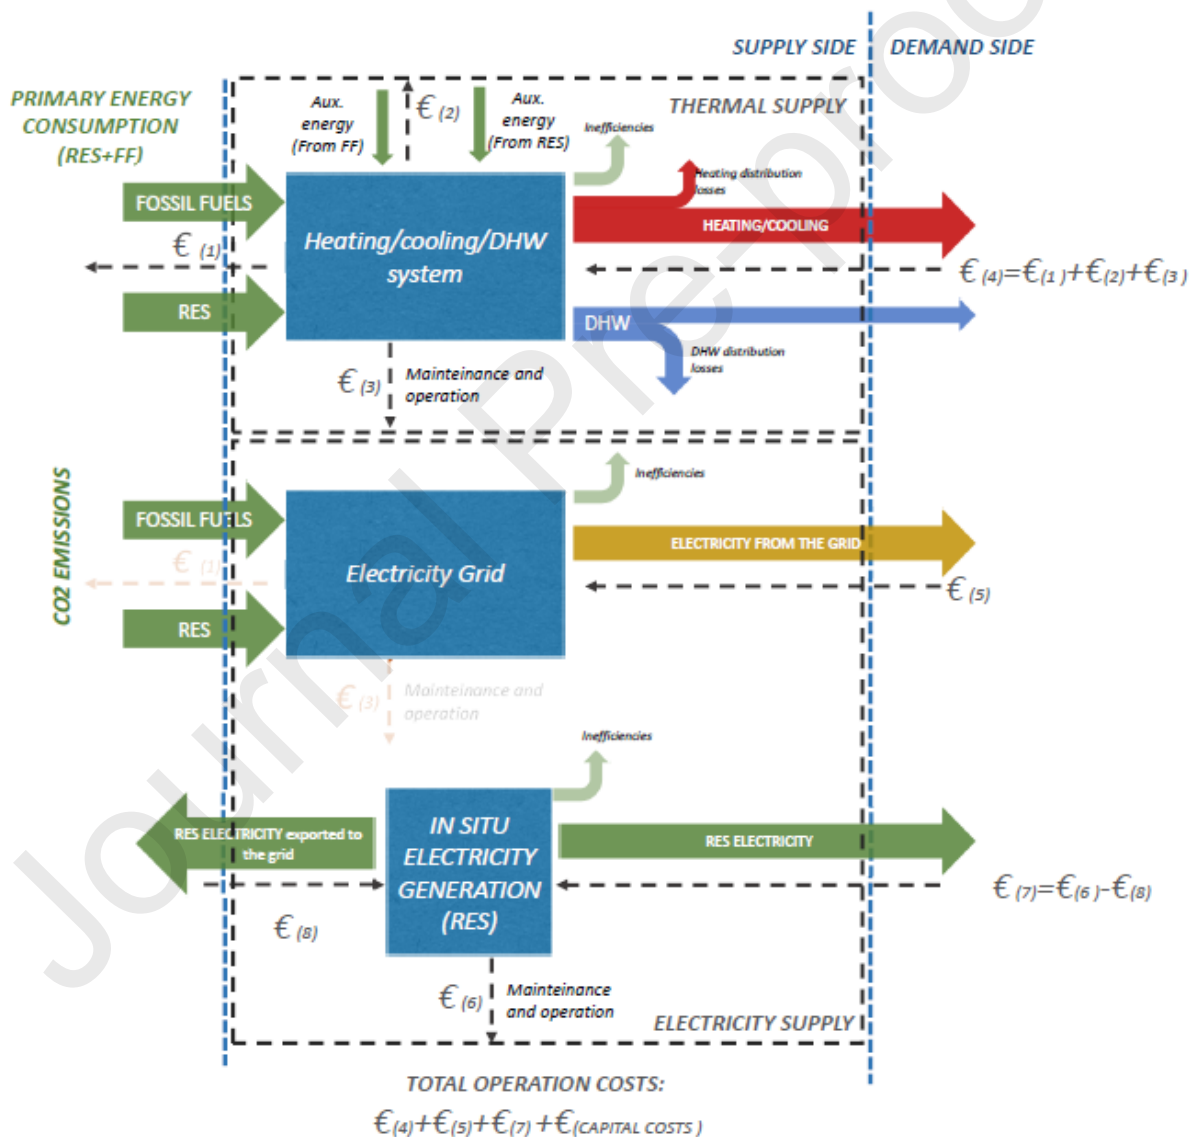

9  
 10

Fig. 3. Overview of money flows related to energy costs and maintenance/operational costs

11 As depicted, the approach considers the two different types of supply that can be found in any building or  
 12 building cluster: thermal energy (including heating, DHW and/or cooling) and electricity. Besides,

1 electricity supply can be divided into two different subsystems: electricity supplied from the grid, and  
2 electricity produced in situ, by means of renewable energy.

3 When analysing the energy inputs in the “thermal system”, they can be renewable energy, fossil fuels and  
4 auxiliary energy. The output is the energy for the heating, cooling and/or DHW supplies. In both cases,  
5 this output comprises useful energy plus distribution losses. Thus, energy inputs equal energy outputs,  
6 including the energy losses due to the system inefficiencies. In a similar way, the running costs of a specific  
7 system will be those related to the energy purchase ( $\text{€}_1$  and  $\text{€}_2$ ) and costs related to maintenance,  
8 management and operation of the system ( $\text{€}_3$ ). The sum of these costs directly affects the total operation  
9 costs for the system associated with the thermal subsystem ( $\text{€}_4$ ).

10 Regarding electricity from the grid, only final electricity costs are taken into consideration ( $\text{€}_5$ ). This cost  
11 is in fact the result of the different costs that this subsystem has to cover, such as the energy cost that have  
12 to be paid to generators or maintenance cost to the grid, which are out of the scope of this project.

13 Finally, in the other subsystem considered, “in situ electricity generation from RES”, only energy outputs  
14 are considered: energy used in the evaluated district, and energy exported to the grid. As far as money  
15 flows are concerned, a cost of maintenance and operation ( $\text{€}_6$ ) and a benefit of electricity sold to the grid  
16 ( $\text{€}_8$ ) are considered. The benefit or the deficit of this subsystem for end users is the difference between  
17 these two costs ( $\text{€}_7$ ). It should be noted that this balance is highly dependent on regulations in each  
18 country: even though still in some cases the user has to pay to get rid of electricity production, the majority  
19 of the national regulations in European countries are being adapted to facilitate the exports of the  
20 electricity surpluses to the grid. However, the terms of these exports (mainly related to the costs) may  
21 significantly vary in each country. In addition, there are costs associated with the investments for these  
22 systems and resulting capital costs. Besides, it will require to perform hourly calculations if a detailed  
23 assessment of this issue is wanted.

24 Total energy costs and maintenance/operational costs for a related measure or set of related measures are  
25 the sum of  $\text{€}_4$ ,  $\text{€}_5$  and  $\text{€}_7$ . In addition, there are costs associated with the amortization of the initial  
26 investments for these systems and resulting capital costs ( $\text{€}_{\text{CAPITAL-COSTS}}$ ).

### 27 **3.3.2 Energy prices**


28 As far as energy prices are concerned, it is recommended in this methodology to take into account the  
29 expected future increases, in conformity with the report prepared for the European Union in 2016 on

1 energy, transport and GHG emissions trends to 2050 [28]. For that reason, it is proposed to carry out the  
 2 assessment with energy prices expected for 2030 to take into account future price increases. Further  
 3 scenarios for energy prices may be included as a part of sensitivity calculations. Regarding the interest  
 4 rate, an indicative value of 3% is applied, unless more country-specific information is available.

### 5 3.4 System boundaries

6 The system boundary is set to correspond to “net delivered energy”. A graphic overview of it is depicted  
 7 in Fig. 4. Energy carriers delivered to the building are added up, and for on-site generated electricity or  
 8 heat exported from the building to the grid, a benefit is granted, which improves energy performance and  
 9 lowers the GHG emissions of the buildings. However, it is proposed to assume that electricity in the grid  
 10 is based on renewable energy, to take into account upcoming changes in the electricity mix, which then  
 11 does not lead to any significant benefit other than potentially cost savings.

12 On-site generation of electricity is taken into account when it is produced from renewable sources. It is  
 13 distinguished how much of electricity produced is consumed locally, and how much is exported to the  
 14 grid. Revenues from exports of electricity or heat to the grid or an energy distribution system are taken  
 15 into account (already considered in Fig. 3, as €<sub>8</sub>).

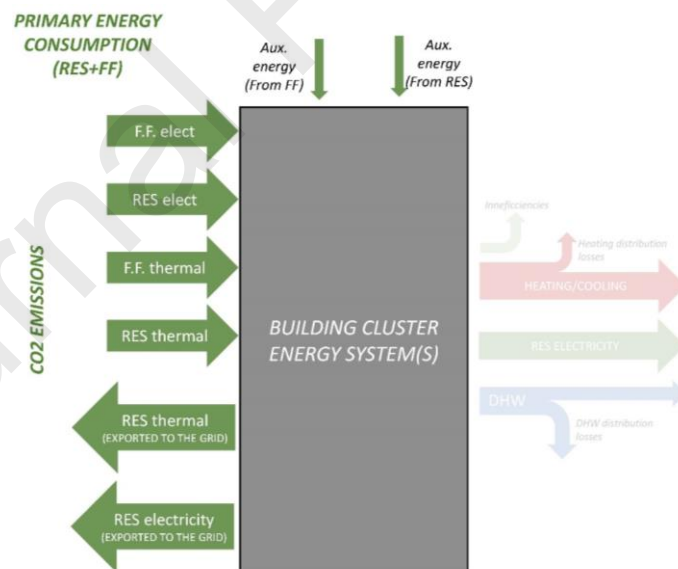

16  
 17 **Fig. 4. Overview system boundaries and energy exchanges (RES – Renewable Energy Sources; FF – Fossil Fuels)**

## 18 4 Assessment procedure

19 At the beginning of the assessment, the group of buildings to be investigated is defined. This can either be  
 20 a generic district based on reference buildings (as demonstrated later in this paper), or a specific district  
 21 of a case study.

1 As far as thermal features are concerned, one way to estimate the U-values of buildings is by applying top-  
2 down approaches involving GIS data information such as a classification of each building according to its  
3 building period and latest renovation, and to apply then standard values for these buildings corresponding  
4 to their building period or the time of their latest renovation. Other possibilities could be remote-detected  
5 energy consumption or estimates made based on measured energy consumption, for example with data  
6 from the energy company, or even data provided by energy performance certificates.

#### 7 **4.1.1 Definition and assessment of reference case**

8 For assessing cost and economic efficiency of energy renovation measures, the procedure developed in  
9 the Annex 56 at building scale is taken as a basis [23] and adapted to the district level. Before assessing  
10 energy renovation measures, a reference situation is defined to properly determine the effects of energy  
11 related renovation on energy use, greenhouse gas emissions and costs by comparing the impacts of the  
12 energy-related renovation scenarios with the impacts in the reference case. In Annex 56, to do that, a  
13 reference case was defined based on an intervention that comprises renovation measures that would have  
14 to be carried out anyway, just to restore the building's functionality (e.g. repainting the walls or repairing  
15 the roof to make it again water-proof). It is assumed that these anyway measures do not increase the  
16 energy performance of the building, but they involve costs. If necessary, hypothetical assumptions are  
17 made about the costs for such measures.

18 For heating and cooling systems, a replacement is also taken into account in the reference case. This is  
19 necessary to assess the costs of installing a new system in comparison with a correct reference scenario.  
20 In the reference case, the replacement is considered to be of the same type as the system installed before.  
21 Modern heating or cooling systems, even if based on fossil fuels, usually have slightly higher conversion  
22 efficiencies than previous systems of the same type. An increase in energy efficiency with respect to the  
23 system is usually taken into account also in the reference case. This reference case was designated as  
24 "anyway renovation" [23] and it is also applied in this methodology.

25 The methodology is open to evaluate additional reference scenarios without anyway measures (e.g. in a  
26 sensitivity analysis at the end), in order to assess the impact of taking or not into account such anyway  
27 measures. It might be argued that assessments without anyway measures for some buildings may be  
28 adequate in districts with large differences in renovation cycles of the buildings, as in such district it would  
29 be possible that energy renovation measures are carried out in connection with a district-wide renovation  
30 on those buildings for which the necessary anyway measures are still far in the future. This point may be



1 taken into consideration in cases studies applying the methodology. However, it is assumed that  
2 differences in renovation cycles similarly affects anyway measures and energy efficiency measures in the  
3 districts, and it is adequate to take into account in the reference case anyway measures in order to  
4 specifically assess the impacts on the costs of energy-related parts of the measures.

#### 5 **4.1.2 Definition of building renovation scenarios**

6 Once the KPIs of the reference case has been calculated, a set of building renovation measures is chosen,  
7 which are taken into consideration for inclusion in building renovation scenarios. Based on this set of  
8 renovation measures, either a limited number of combinations of renovation measures are identified as  
9 renovation packages for which the assessment is carried out, or an optimisation is carried out to identify  
10 the optimal solutions by choosing appropriate combinations through an optimisation engine. With the  
11 optimisation, the least cost combinations are sought satisfying the boundary conditions. For the  
12 investigated renovation packages, costs and effects of renovation measures are determined.

13 In this manner, for each building in the district, about 10 renovation packages are investigated, which  
14 have progressively higher ambition levels related to the resulting energy performance of the building  
15 envelope (by means of energy saving measures) and energy supply systems. A replacement of the heating  
16 system is assumed in all cases, whereas heat distribution system including the radiators is assumed to  
17 remain the same, even though they can be changed as well.

18 The renovation packages investigated will be chosen in a way to allow answering the research questions.  
19 In order to do this, it is important that varying levels of energy efficiency of the building envelope are  
20 investigated, in combination with various types of heating systems. At the same time, it may be useful to  
21 align various renovation packages investigated with a variety of standards as occurring in a given country,  
22 to make the results more easily interpretable. Evaluating also combinations with at least one fossil fuel  
23 based system (centralised or decentralised according to the starting point of the district) and with both a  
24 centralised and a decentralised RES systems is recommended.

25 The size of the heating system is calculated by determining the required peak capacity to maintain the  
26 target indoor temperature despite heat losses during wintertime, and it is necessary to take into account  
27 that new heating systems can be downsized due to better insulation.

28 To identify the optimal solution, different approaches can be applied. Here it is proposed to consider as  
29 suitable solutions only combinations that result in an energy use covered fully by renewable energies; this

1 includes electricity use, with a combination of electricity produced on-site and electricity imported from  
2 the grid. With this condition, the remaining GHG emissions are those associated with embodied emissions  
3 of the renovation measures and upstream emissions of the energy carriers. Among solutions that satisfy  
4 this condition, the optimal solution is then chosen by taking into account PE use as well as costs.

5 As mentioned in the previous section, the assessment is based on calculations and not on actually  
6 observed energy performance. In reality, it is sometimes observed that the energy efficiency performance  
7 levels do not reach the target values according to the calculations. Such observations are referred to as  
8 performance gap, which has been profusely studied and several references can be found in the literature,  
9 such as the comprehensive work recently published by E. Cuerda et al. in [29]. For carrying out the  
10 assessment, it is not necessary to take into account these effects, but it needs to be kept in mind, though,  
11 that this may potentially overestimate to a certain degree the cost-effectiveness of renovation measures.

#### 12 **4.1.3 Expected results and sensitivity analysis**

13 For carrying out the assessments, the main KPIs introduced in section 3.1 are calculated. Thus, in order  
14 to assess the cost-effectiveness of different renovation packages, a comparison is made between the  
15 reference case and the renovation packages. Results are illustrated evaluating specific GHG emissions vs.  
16 costs and specific PE use vs. costs.

17 Moreover, it is recommended to evaluate the results by varying certain parameters to identify factors that  
18 strongly influence the results of the calculations. It may be particularly appropriate to take into account  
19 the parameters with higher uncertainties, such as the future development of energy cost, and various  
20 parameters characterising the district.

#### 21 **4.1.4 Relation between energy efficiency measures and implementation of renewable 22 energy systems**

23 Finally, there are several relationships between EE measures and RES measures, which affect significantly  
24 the project outcomes and, in consequence, they should be taken into consideration when the assessments  
25 are carried out.

26 The first is the relation between energy consumption and level of insulation of the building envelope. The  
27 better insulated the buildings are, the lower are their energy needs and the resulting energy consumption.  
28 This effect is stronger on reducing costs in case of fossil fuel based heating systems in comparison with  
29 renewable energy based heating systems, due to the lower operational energy costs of the latter.

1 The second is the importance of modelling the costs of the heating systems in an appropriate way as a  
2 function of the capacity of the heating system. This capacity is directly affected by the EE measures carried  
3 out, and this relationship is a key factor for assessing synergies or trade-offs between EE and RES  
4 measures. Due to economies of scale, the costs for a heating system are usually a logarithmic function of  
5 the installed capacity for large capacities. In order to facilitate the assessment, it is proposed to  
6 approximate the cost function with a piece-wise linear approximation based on a limited set of discrete  
7 capacity/costs relationships.


8 Finally, a remark related to heat pumps should be done. For them, there is an important synergy with EE  
9 measures on the building envelope, because the lower the energy need of a building is, the lower can be  
10 (to some extent) the temperature of the heat distribution system, which involves an increase of the  
11 efficiency of heat pumps. At the same time, in the case of high efficient buildings, the average outdoor  
12 temperature during which the heating system is in operation is lower than for less insulated buildings. As  
13 a consequence, the conversion efficiency of heat pumps tends to decrease in more energy efficient  
14 buildings. In addition, an increased energy performance of the buildings may have an impact on reducing  
15 heat losses in a district heating system. Therefore, it is necessary to take into account these issues when  
16 the conversion efficiencies of heat pumps are calculated, as a function of the heat need of the building  
17 cluster.

## 18 **5 Demonstration of the proposed methodology: a Portuguese case study**

19 In order to demonstrate the methodology, parametric calculations were carried on the Picoto  
20 neighbourhood in Braga region, located in the north of Portugal (see Fig. 5). Picoto is a social housing  
21 neighbourhood built in the 1990's. In Portugal, most social housing neighbourhoods arose after 1986 to  
22 meet the needs of adequate housing conditions of low-income households. In 1993, with the PER (Special  
23 Resettlement Program), social housing was significantly promoted, and cooperative housing and  
24 municipal housing emerged. Social housing buildings in Portugal represent about 2% of the total housing  
25 stock [30]. Municipalities, small municipal companies or the Institute of Housing and Urban  
26 Rehabilitation (IHRU, acronym of "Instituto da Habitação e da Reabilitação Urbana") manage these  
27 neighbourhoods. In the majority of these neighbourhoods, affordability and reduced cost of construction  
28 were prioritised over quality and energy efficiency criteria. Consequently, indoor thermal comfort  
29 conditions are commonly not adequate and significant building pathologies are normally reported in this  
30 type of buildings.

## 1 **5.1 Case study: Picoto social housing neighbourhood**

2 The Picoto neighbourhood is located in Braga, location classified as Csb (Mediterranean warm/cool  
3 summer climates) in the Köppen and Geiger climate system [31]. The average annual temperature is  
4 14.2°C, with the hottest month being July (average of 20.3°C) and January being the coldest with an  
5 average of 8.4°C [32]. The Picoto social housing neighbourhood is representative of the social housing  
6 context in Portugal in terms of the low quality in construction, poor energy performance and inadequate  
7 thermal comfort conditions. The neighbourhood is composed of 50 single-family buildings with two  
8 floors, organised in seven different blocks with two predominant orientations – North/South and  
9 East/West – and with a total heated area of 1770 m<sup>2</sup>. In terms of constructive characteristics, buildings in  
10 the neighbourhood all have similar building envelopes. There are two types of façades in each building.  
11 The façade type 1 (F1) is composed of two layers of hollow bricks (9cm+9cm) and no insulation (U-value  
12 of 1.1 W/m<sup>2</sup>K). The bottom part of the buildings is constituted by the façade type 2 (F2), which is composed  
13 of concrete blocks with a U-value of 1.9 W/m<sup>2</sup>K. The sloping roof is constituted by asbestos cement  
14 undulating panels (U-Value of 3.8 W/m<sup>2</sup>K) and windows are single glazing with an aluminium frame with  
15 a U-value of 5.70 W/m<sup>2</sup> K. Individual electric heaters provide space heating and a gas boiler in each  
16 building supplies DHW, which are the most common solutions found in this social context. Three general  
17 views of the neighbourhood are depicted in Fig. 5. The chosen neighbourhood is not intended to represent  
18 the Portuguese building stock, which is marked by a significant heterogeneity. However, some of these  
19 characteristics for this group of buildings are very particular of the Portuguese context (where there is no  
20 practice of district heating), and it represents a suitable and challenging example for the application of  
21 the methodology.

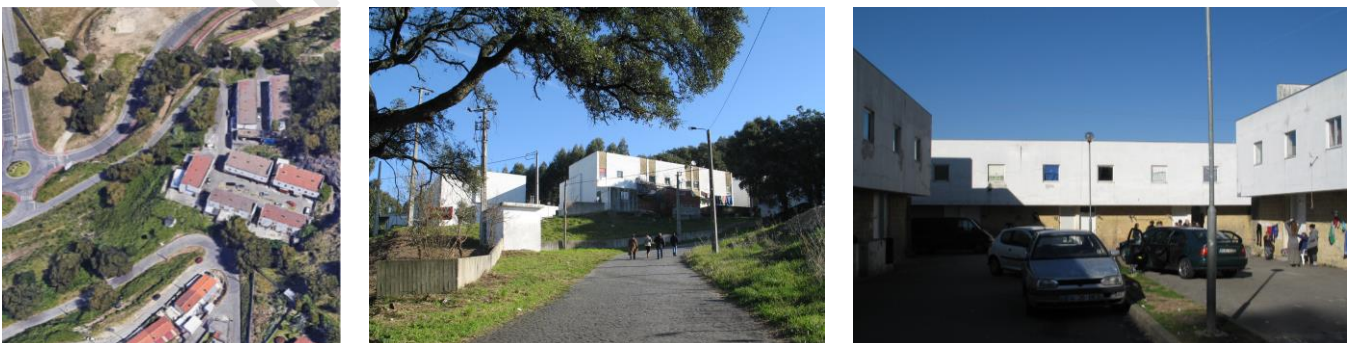

22 **Fig. 5. Case study district. Aerial and general views of the neighbourhood**

23 Considering all aforementioned features, the energy demand of the reference case was calculated by  
24 means of dynamic simulations carried out with Energy Plus Software. It is recognised here that this type  
25 of calculation can be influenced by different sources of uncertainties, being one of the most important, the

1 influence of user behaviour. For these energy calculations, a typical user behaviour and occupancy pattern  
 2 were considered [33]. DHW load was estimated according to standard values stated in thermal regulations  
 3 [34]. These values are summarised in Table 2.

4 **Table 2. Specific heating, cooling and DHW needs assumed for the district (Total conditioned area: 1,767 m<sup>2</sup>)**

	HEATING		COOLING	DHW
	<i>(kWh/m<sup>2</sup> year)</i>	<i>(kWh/year)</i>	<i>(kWh/m<sup>2</sup>.year)</i>	<i>(kWh/m<sup>2</sup>.year)</i>
<b>District load</b>	164.31	290,335	7.33	26.16

5

## 6 **5.2 Renovation scenarios**

7 In order to study the effects of the renovation interventions on the neighbourhood and to test the research  
 8 questions under study in the project, five packages of building envelope measures (Table 3), as well as five  
 9 system solutions were analysed (listed in Table 4). Simulations were performed by means of numerical  
 10 simulations, using Energy Plus, a dynamic energy simulation software [35]. The simulated interventions  
 11 are focused on the neighbourhood scale and, therefore, the packages of renovation measures were  
 12 considered to be implemented in every building in the neighbourhood. The chosen renovation measures  
 13 in the packages were aggregated after a preliminary individual assessment and represent common  
 14 practices in Portugal and in this social housing context. In addition, when pertinent, the materials used  
 15 in interventions on façades type 1 (F1) and type 2 (F2) were distinguished and are indicated in Table 3.  
 16 Systems were designed using a centralised approach (i.e. one system for the whole neighbourhood), except  
 17 for the conventional decentralised system solution (electric heater for heating, multi-split system for  
 18 cooling and gas heater for DHW), which represents the individual default system normally considered in  
 19 residential calculations [34] and was considered useful for comparison purposes. Centralised simulated  
 20 systems were designed to meet 100% of the heating, cooling and DHW needs, with exception for the  
 21 centralised biomass boiler with condensing technology (ESS 1), which does not consider cooling. This  
 22 approach is considered possible in the Portuguese thermal regulation [34] whenever the overheating risk  
 23 in summer is minimum, which is quite common in a substantial part of the Portuguese territory. There  
 24 are three simulated energy supply systems based on heat pump technology (ESS 2, 3 and 4). Energy supply  
 25 systems 3 and 4 also considered other sources of renewable energy supply. The heat pump + solar thermal  
 26 (ESS3) considers that DHW energy needs are offset by the implementation of solar thermal panels. This  
 27 option reflects a practice commonly adopted in Portugal. Motivated by current national thermal  
 28 regulations and subsidies, by the availability of yearly solar radiation and affordable investment costs

(1.45€/kWh.a), the use of solar thermal panels for offsetting DHW is a generalised approach for reducing energy demand in residential buildings. For this approach, it would be required about 150 m<sup>2</sup> of available area. The heat pump+photovoltaic energy supply system (ESS4) assumes that the heating, cooling and DHW energy needs are supplied by crystalline silicon photovoltaic panels supported by battery storage. This approach assumes no restrictions on the availability of physical space for its implementation and intends to understand whether centralised PV systems can be a cost-effective alternative for the decarbonisation of the neighbourhood. The investment costs of PV panels are higher than in the case of solar thermal panels (2,07€/kWh.a) and, according to calculations, implementation of PV panels to offset the total primary energy needs would require, in this case, 670 m<sup>2</sup> of available area.

Regarding the economic assessment, the investment cost for the different renovation packages, as well as for the different energy supply systems (including grid and system implementation costs) were collected from market-based suppliers and from an established costs database widely used in the construction sector in Portugal [36]. Similarly, energy costs assumed in the analysis are 0.21 €/kWh for electricity, 0.06 €/kWh for natural gas [37]. Regarding the evolution of energy costs, and to reduce uncertainty, the analysis took into account results from established studies [38, 39]. An interest rate of 5% was considered in this analysis. For comparison reasons, in the cost-effectiveness calculations, the reference case considers that an “anyway renovation” (i.e. an intervention for maintenance reasons, not improving the energy performance of the buildings) was performed.

**Table 3. Main features of the evaluated packages**

<b>Renovation packages for improving the buildings' envelope</b>			
	<b>Façade</b>	<b>Roof</b>	<b>Windows</b>
<b>Renovation packages</b>	<b>P1</b>	ETICS MW 80mm (F1* and F2**)	Sandwich panel PUR 30mm PVC frame with double low emissivity glazing ( $U = 1.40 \text{ W}/(\text{m}^2\text{K})$ ) with solar protection ( $g=0.20$ )
	<b>P2</b>	ETICS EPS 80mm (F1* and F2**)	Sandwich Panel MW 30mm Aluminium frame with double glazing ( $U = 3.30 \text{ W}/(\text{m}^2\text{K})$ and $g=0.76$ )
	<b>P3</b>	ETICS EPS 80mm (F1* and F2**)	Sandwich panel PUR 30mm Aluminium frame with double glazing ( $U = 3.30 \text{ W}/(\text{m}^2\text{K})$ and $g=0.76$ )
	<b>P4</b>	ETICS EPS 80 (F1*) ETICS EPS 120 (F2**)	Sandwich Panel MW 100mm Aluminium frame with double glazing ( $U = 3.30 \text{ W}/(\text{m}^2\text{K})$ and $g=0.76$ )
	<b>P5</b>	ETICS MW 160mm (F1*) ETICS MW 200mm (F2**)	Sandwich Panel MW 100mm PVC frame with double low emissivity glazing ( $U = 1.40 \text{ W}/(\text{m}^2\text{K})$ ) with solar protection ( $g=0.20$ )

ETICS – External Thermal Insulation Composite System; MW – Mineral Wool; EPS – Expanded Polystyrene; PUR – Polyurethane foam; PVC – Polyvinyl chloride; \*F1 – Façade Type 1; \*\*F2 – Façade Type 2

1

Table 4. System solutions

	Energy supply system (ESS)	Heating	Cooling	DHW	RES
System Solution	<b>1: Conventional Decentralised</b>	Electric Heater h=1	Multi-split EER=3	Natural Gas Heater h =0.71	-
	<b>2: Centralised Heat Pump</b>	Heat Pump COP/SCOP=4.06/3.77	Heat Pump EER/SEER=3.97/8.41	Heat Pump COP=4.10	-
	<b>3: Centralised Heat Pump +ST</b>	Heat Pump COP/SCOP=4.06/3.77	Heat Pump EER/SEER=3.97/8.41	Heat Pump COP=4.10	ST (DHW)
	<b>4: Centralised Heat Pump +PV</b>	Heat Pump COP/SCOP=4.06/3.77	Heat Pump EER/SEER=3.97/8.41	Heat Pump COP=4.10	PV (zero)
	<b>5: Centralised Biomass Boiler</b>	Biomass Boiler h=1.07	(zero)	Biomass Boiler h=1.07	-


ST – Solar Thermal; PV – Photovoltaic system

2

### 3 5.3 Results from the parametric studies

4 The main results from parametric studies are presented in Fig. 6, in terms of emissions per year  
5 (kgCO<sub>2</sub>eq/(m<sup>2</sup>.year) and Non-Renewable Primary Energy (NRPE) (kWh/(m<sup>2</sup>.year), per annualised costs.  
6 Results show that the lowest annualised costs are achieved when the ESS 2 presented in Table 4  
7 (centralised heat pump) is used. Specifically, annualised costs range in this case from 47.60 to 62.05 €/m<sup>2</sup>,  
8 depending on the energy saving measures implemented on the envelope. When the NRPE and emissions  
9 are the focus, ESS 4 and ESS 5 (Centralised heat pump + PV and Centralised Biomass Boiler, respectively,  
10 as presented in Table 4) present the best performance achieving, in both cases, a zero emission district,  
11 regardless of the renovation package implemented on the envelope. Interestingly, these combinations  
12 achieve this performance with very different ratios of RES for the total energy needs. For the packages  
13 being combined with ESS4 this ratio ranges from 0.41 to 0.47, depending on the package of measures for  
14 improving the building envelope. However, when ESS5 is considered, every package presents a ratio of 1.  
15 Regarding the renovation packages proposed in Table 3, it could be observed that P5 (ETICS MW 160mm  
16 + ETICS MW 200mm + Sandwich Panel MW 100mm + PVC frame with double low emissivity glazing) is

1 the package of renovation measures that consistently leads to higher reductions of NRPE (an average  
 2 reduction of 375 kWh/m<sup>2</sup>.year in all EESs), although at a considerable higher cost when compared to the  
 3 rest of the packages. Despite this, there are differences in the hierarchy of measures depending on the  
 4 energy supply system. For the EES1 (Conventional Decentralised), the ESS4 (Centralised Heat Pump+PV)  
 5 and ESS5 (Centralised Biomass Boiler), the cost optimal measure is P3 (ETICS EPS 80mm+Sandwich  
 6 Panel PUR 30mm+double glazing aluminium windows), with annualised costs of 80.02 €/m<sup>2</sup>, 67.14 €/m<sup>2</sup>  
 7 and 57.30 €/m<sup>2</sup>, respectively. However, for EES2 (Centralised Heat Pump) and ESS3 (Centralised Heat  
 8 Pump+ST) is P2 (ETICS EPS 80mm+Sandwich Panel MW 30mm+double glazing aluminium windows),  
 9 with annualised costs of 47.60 €/m<sup>2</sup> and 56.45 €/m<sup>2</sup>.

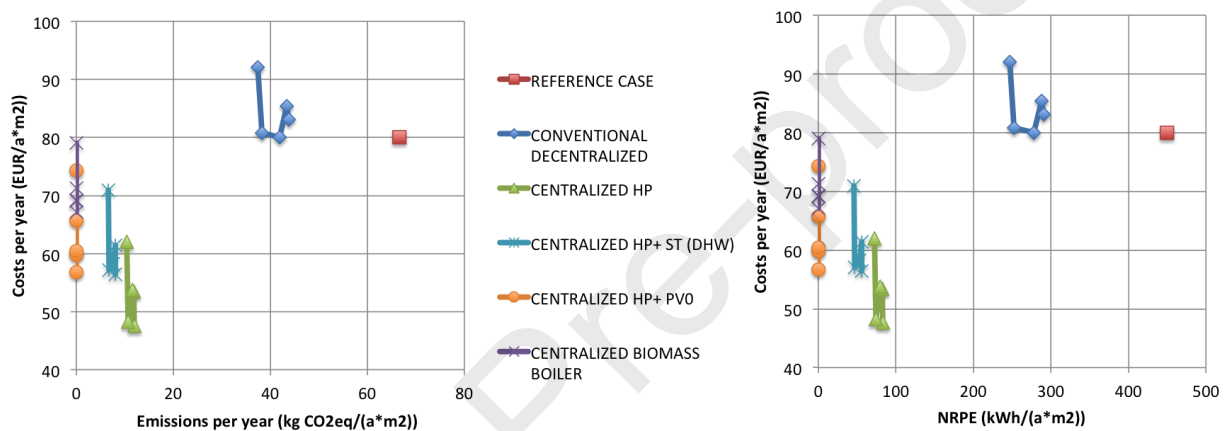

10

11 **Fig. 6. Calculation results from Picoto neighbourhood simulations**

12 Results indicate that all the analysed centralised approaches are cost-effective. It is worth highlighting  
 13 that besides the investment in systems and building envelope measures, the initial costs also include the  
 14 cost of distribution (e.g. piping and associated civil works). In fact, the results from every renovation  
 15 measure, when combined with the decentralised systems, present significantly higher global costs than  
 16 the reference case. In opposition, the renovation package P2 (ETICS EPS 80mm+Sandwich Panel MW  
 17 30mm+double glazing aluminium windows) using a centralised Heat Pump is the cost-optimal  
 18 intervention for the Picoto neighbourhood. Relevantly, it should also be highlighted that renovation  
 19 measures simulated in combination with ESS4 (Centralised Heat Pump +Photovoltaic) and ESS5  
 20 (Centralised Biomass Boiler) can lead the Picoto neighbourhood to an energy and carbon emissions  
 21 neutrality, while maintaining cost-effectiveness. This result is significant in the light of the initial costs  
 22 being recurrently identified as one of the main barriers for implementation of the energy renovation  
 23 interventions. Due to the size of the required systems and their high initial investment costs, this issue



1 can represent a major hurdle. In these calculations, costs just for the centralised heat pump system  
2 represent a 50 % increase in relation to the cost of all the necessary individual electric heaters considered  
3 in the decentralised approach. However, the consideration of a lifecycle perspective of the costs, allows for  
4 a deeper understanding of the lasting effects and the advantages potentially drawn from such an  
5 intervention.

6 In addition, both ESS4 and ESS5 (as well as Heat Pump Centralised +Solar Thermal) surpass the  
7 minimum requirements (both in terms of energy efficiency and renewable energy supply) for nZEB  
8 (nearly zero energy buildings), which will be mandatory for new buildings from the 1<sup>st</sup> of January of 2021.

9 In Portugal, the minimum requirements that a residential building must meet in order to reach the nZEB  
10 level are to have primary energy needs 50% lower than a predefined reference level and renewable energy  
11 sources supply at least 50% of the annual primary energy needs. [31].

12 Even though the research questions evaluated in the Annex 75 project should be addressed once  
13 considering different case studies evaluated across Europe and under different conditions, some insights  
14 related to the mentioned research questions could be identified looking at these results. This way, it is  
15 demonstrated how the proposed methodology could lead to find the answers when applying it in different  
16 case studies. In this case study, results suggest that cost-effective combinations between RES and EE  
17 measures are achievable using centralised approaches. In response to RQ1, it is relevant that the balance  
18 between the application of a centralised Heat Pump and Photovoltaic panels in combination with a  
19 package of renovation measures on the envelope (even the ones not necessarily addressing the full  
20 potential of energy savings from the building envelope, such as P3, for example) can lead the district to  
21 zero energy and carbon emissions neutrality within the limits of cost-effectiveness. On the other hand, as  
22 a response to RQ2, there is a greater difficulty, at this scale, in achieving balance in combinations  
23 regarding cost-effectiveness in a decentralised approach, like ESS1. In fact, results from this analysis show  
24 that only one package of renovation measures (P3) allows for cost-effectiveness in the decentralised  
25 approach to the neighbourhood. Moreover, and in relation to RQ3, results suggest that the efficiency of  
26 the energy supply system (which leads to significant operational energy savings during the building  
27 lifecycle) can be a key factor for the cost-effectiveness of the balance between energy efficiency measures  
28 and renewable energy supply. Additional factors arising from this analysis, with particular relevance to  
29 the Portuguese context, and influencing the balance of combinations are related to the pre-existing  
30 situation of the buildings in the neighbourhood (namely in terms of low energy performance) with the

1 available area for implementation of RES and its cost/efficiency ratio, as well as with the need for an  
2 additional cost in storage solutions. This is particularly important in the comparison between solar  
3 thermal and PV panels, for example. Solar thermal (if used for DHW) allows easy and inexpensive storage  
4 while the cost of storing electricity produced by PV panels is not negligible.

## 5 **6 Conclusions and future works**

6 Evaluating cost-effective strategies for reducing GHG emissions and energy use in buildings in cities at  
7 district level is a complex task. There are different research questions that can be investigated in this  
8 context. The methodology proposed by the Annex 75 project and presented in this paper provides a basis  
9 for investigating particularly the cost-effective balance between carrying out energy efficiency measures  
10 and deploying RES measures in the renovation of buildings at district level, and its application has been  
11 demonstrated in a real case study located in Portugal.

12 The application of this methodology for evaluating the case study has demonstrated the usefulness of the  
13 methodology for answering the research questions under study in this project. Moreover, even though  
14 more case studies should be evaluated to have answer comparably to other countries, the evaluated case  
15 study presents also interesting conclusions related to the mentioned research questions applied in the  
16 specific conditions in Portugal, as the case of Picoto neighbourhood. In particular, there are insights that  
17 can be drawn from this research that can address research questions 1, 2 and 3 (RQ1, RQ2 and RQ3). In  
18 relation to RQ1, importantly, Centralised Heat Pump + Photovoltaic and Centralised Biomass Boiler  
19 system solutions can lead the Picoto neighbourhood to an energy and carbon emissions neutrality, while  
20 maintaining cost-effectiveness. Regarding RQ2, the study highlights the advantage in terms of energy  
21 efficiency as well as costs of considering a centralised approach when addressing a group of building or  
22 neighbourhood such as the case study investigated here. In relation to RQ3, the study allowed for the  
23 indication of the efficiency of the energy supply system as one of the key factors for the cost-effectiveness  
24 of the balance between energy efficiency measures and renewable energy supply.

25 Although results are clearly related to the particular context of Portugal, the study is useful for  
26 demonstrating the applicability of the methodology. Moreover, results indicating that heating demand in  
27 this type of climate can be lower than in Northern Europe (where district heating for example, is widely  
28 disseminated) can be useful to understand the cost-effectiveness of centralised solutions and local heating  
29 network systems addressing neighbourhoods, in particular for southern countries in Europe as well. To  
30 comprehensively validate the methodology presented here, it is important to investigate other contextual

1 settings and pre-existing situations, as this project plans to do in a next step. A deeper assessment of  
2 expected uncertainties, such as specificities in terms of the evolution of energy costs depending on the  
3 national context is also recommendable for future studies. This will also allow obtaining general trends  
4 and conclusions comparably to different countries and regions, regardless of their climate conditions and  
5 other specific conditions.

## 6 **7 Acknowledgements**

7 The work presented in this paper has been developed by the authors as a contribution to the IEA EBC  
8 Annex 75 project. The authors would like to acknowledge all the project participants and all national  
9 funding organizations.

10 The author Raúl Briones-Llorente wishes to acknowledge the *Consejería de Educación de la Junta de*  
11 *Castilla y León* (Spain) and the Operational Programme European Social Fund for the funding of his  
12 doctoral scholarship.

## 13 **8 References**

14 [1] European Commission, Energy, transport and environment indicators. Eurostat (2012).

15 [2] IPCC, *Climate Change 2007: Synthesis Report. Contribution of Working Groups I, II and III to the*  
16 *Fourth Assessment Report of the Intergovernmental Panel on Climate Change* (2007) 144 pp.

17 [3] 2020 Climate and energy package—European Commission,  
18 [https://ec.europa.eu/clima/policies/strategies/2020\\_en](https://ec.europa.eu/clima/policies/strategies/2020_en) (2017).

19 [4] 2030 Climate and energy framework — European Commission.,  
20 [https://ec.europa.eu/clima/policies/strategies/2030\\_en](https://ec.europa.eu/clima/policies/strategies/2030_en) (2018).

21 [5] European Commission, Directive 2012/27/EU on Energy Efficiency (2012).

22 [6] European Commission, Directive 2010/31/EU on the Energy Performance of Buildings (2010).

23 [7] O. Mørck, M. Almeida, M. Ferreira, N. Brito, K.E. Thomsen, I. Østergaard, Shining Examples Analysed  
24 within the EBC Annex 56 Project, *Energy Procedia*. 78 (2015) 2334-2339.

25 [8] S. Paiho, J. Ketomäki, L. Kannari, T. Häkkinen, J. Shemeikka, A new procedure for assessing the  
26 energy-efficient refurbishment of buildings on district scale, *Sustainable Cities and Society*. 46 (2019)  
27 101454.

28 [9] O. Mørck, M. Almeida, M. Ferreira, N. Brito, K.E. Thomsen, I. Østergaard, Shining examples analysed  
29 within the EBC Annex 56 project, *Energy Build.* 127 (2016) 991-998.

30 [10] S. Domingo-Irigoyen, A. Sánchez-Ostiz, J.S. Miguel-Bellod, Cost-effective Renovation of a Multi-  
31 residential Building in Spain through the Application of the IEA Annex 56 Methodology, *Energy Procedia*.  
32 78 (2015) 2385-2390.

- 1 [11] Å Blomsterberg, E. Pedersen, Tenants Acceptance or Rejection of Major Energy Renovation of Block  
2 of Flats – IEA Annex 56, *Energy Procedia*. 78 (2015) 2346-2351.
- 3 [12] K.E. Thomsen, J. Rose, O. Morck, S.Ø Jensen, I. Østergaard, Energy Consumption in an Old  
4 Residential Building Before and After Deep Energy Renovation, *Energy Procedia*. 78 (2015) 2358-2365.
- 5 [13] M. Almeida, M. Ferreira, Cost effective energy and carbon emissions optimization in building  
6 renovation (Annex 56), *Energy and Buildings*. 152 (2017) 718-738.
- 7 [14] F. Cappelletti, T.D. Mora, F. Peron, P. Romagnoni, P. Ruggeri, Building Renovation: Which Kind of  
8 Guidelines could be Proposed for Policy Makers and Professional Owners?, *Energy Procedia*. 78 (2015)  
9 2366-2371.
- 10 [15] IEA EBC Annex 75, IEA EBC Annex 75 - Cost-effective Building Renovation at District Level  
11 Combining Energy Efficiency & Renewables.
- 12 [16] J.S. Mira Conci, A District Approach to Building Renovation for the Integral Energy Redevelopment  
13 of Existing Residential Areas. 9(5) (2017) 747-759.
- 14 [17] European Commission, Commission Recommendation (EU) 2019/786 of 8 May 2019 on building  
15 renovation (2019).
- 16 [18] European Commission, Directive (EU) 2018/844 amending Directive 2010/31/EU on the energy  
17 performance of buildings and Directive 2012/27/EU on energy efficiency (2018).
- 18 [19] S.S. Castro, M.J. Suárez López, D.G. Menéndez, E.B. Marigorta, Decision matrix methodology for  
19 retrofitting techniques of existing buildings, *Journal of Cleaner Production*. 240 (2019) 118153.
- 20 [20] V. D'Alonzo, A. Novelli, R. Vaccaro, D. Vettorato, R. Albatici, C. Diamantini, P. Zambelli, A bottom-  
21 up spatially explicit methodology to estimate the space heating demand of the building stock at regional  
22 scale, *Energy and Buildings*. 206 (2020) 109581.
- 23 [21] S. Ferrari, F. Zagarella, P. Caputo, A. D'Amico, Results of a literature review on methods for  
24 estimating buildings energy demand at district level, *Energy*. 175 (2019) 1130-1137.
- 25 [22] S. Ferrari, F. Zagarella, P. Caputo, M. Bonomolo, Assessment of tools for urban energy planning,  
26 *Energy*. 176 (2019) 544-551.
- 27 [23] W. Ott, R. Bolliger, V. Ritter, S. Citherlet, S. Lasvaux, D. Favre, B. Périsset, M. Almeida, M. Ferreira,  
28 S. Ferrari, Methodology for Cost-Effective Energy and Carbon Emissions Optimization in Building  
29 Renovation (Annex 56). Report produced within the IEA's Energy in Buildings and Communities  
30 Programme, Annex 56, <http://www.iea-annex56.org/> [Last accessed 2019-06-06] (2017).
- 31 [24] A. Kylili, P.A. Fokaides, P.A. Lopez Jimenez, Key Performance Indicators (KPIs) approach in  
32 buildings renovation for the sustainability of the built environment: A review, *Renewable and Sustainable*  
33 *Energy Reviews*. 56 (2016) 906-915.
- 34 [25] ISO 52016-1, Energy performance of buildings - Energy needs for heating and cooling, internal  
35 temperatures and sensible and latent heat loads - Part 1: Calculation procedures (ISO 52016-1:2017)  
36 (2017).
- 37 [26] European Commission, Commission Delegated Regulation (EU) No 244/2012 of 16 January 2012,  
38 supplementing Directive 2010/31EU on the energy performance of buildings, establishing a comparative  
39 methodology framework for calculating cost-optimal levels of minimum energy performance  
40 requirements for buildings and building elements (2012) L 81/18-L 81/36.

- 1 [27] European Commission, EU Reference Scenario 2016. Energy, transport and GHG emissions trends  
2 to 2050 (2016).
- 3 [28] E. Cuerda, O. Guerra-Santin, J.J. Sendra, F.J. Neila, Understanding the performance gap in energy  
4 retrofitting: Measured input data for adjusting building simulation models, *Energy and Buildings*. 209  
5 (2020) 109688.
- 6 [29] Instituto Nacional de Estatística, Inquérito à Caracterização da Habitação Social relativo a 2015  
7 (Retrieved December 12, 2018, from:  
8 [https://www.ine.pt/xportal/xmain?xpid=INE&xpgid=ine\\_destaquas&DESTAQUESdest\\_boui=250034](https://www.ine.pt/xportal/xmain?xpid=INE&xpgid=ine_destaquas&DESTAQUESdest_boui=250034590&DESTAQUESmodo=2&xlang=pt)  
9 [590&DESTAQUESmodo=2&xlang=pt](https://www.ine.pt/xportal/xmain?xpid=INE&xpgid=ine_destaquas&DESTAQUESdest_boui=250034590&DESTAQUESmodo=2&xlang=pt)) (2015).
- 10 [30] M. Kottek, J. Grieser, C. Beck, B. Rudolf, F. Rubel, World map of the Köppen-Geiger climate  
11 classification updated, *Meteorologische Zeitschrift*. 15 (2006) 259-263.
- 12 [31] Climate-Data.org, Climate-Data Braga. Available online:[https://pt.climate-](https://pt.climate-data.org/europa/portugal/braga/braga-131/)  
13 [data.org/europa/portugal/braga/braga-131/](https://pt.climate-data.org/europa/portugal/braga/braga-131/) (accessed on 26 March 2020) (2020).
- 14 [32] R. Barbosa, R. Vicente, R. Santos, Climate change and thermal comfort in Southern Europe housing:  
15 A case study from Lisbon, *Building and Environment*. 92 (2015) 440-451.
- 16 [33] República Portuguesa, Decreto-Lei n.º 118/2013—Regulamento de Desempenho Energético dos  
17 Edifícios de Habitação (REH). *Diário da República* 1.a série N.º 2013, 159, 4988–5005. (2013).
- 18 [34] University of Illinois, University of California, Energy Plus. Getting started. (2013).
- 19 [35] S.A. CYPE Ingenieros, Gerador de Preços. Portugal. Available  
20 online: <http://www.geradordeprecos.info/> (accessed on 4 March 2020). (2020).
- 21 [36] Fundação Francisco Manuel dos Santos, PORDATA – Base de Dados Portugal Contemporaneo.  
22 Available online: <https://www.pordata.pt/> (Accessed on 4 March 2020) (2020).
- 23 [37] International Energy Agency, *World Energy Outlook 2019*. (2019).
- 24 [38] European Commission, EU Reference Scenario 2016 Energy, transport and GHG emissions Trends  
25 to 2050 Main results. (2016).
- 26
- 27 **J. Terés-Zubiaga:** Term, Methodology, Writing – Original Draft.
- 28 **R. Bolliger:** Conceptualization, Methodology, Writing – Review & Editing
- 29 **M. G. Almeida:** Project administration, Supervision, Writing – Review & Editing
- 30 **R. Barbosa:** Software, Formal analysis
- 31 **J. Rose:** Writing – Review & Editing
- 32 **K. E. Thomsen:** Writing – Review & Editing
- 33 **E. Montero:** Software
- 34 **R. Briones-Llorente:** Software

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22

**Declaration of interests**

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

**Highlights**

**(Maximum 85 characters, including spaces, per bullet point)**

- A methodology for identifying cost-effective solutions for districts is presented
- The usefulness of the methodology is shown in a Case study located in Portugal
- All the analysed centralised approaches are cost-effective
- A carbon emissions neutral district can be achieved maintaining cost-effectiveness